

Aqualock - Service Penetration Sealing System

Rev1- 25/03/25 - [QMF code]

Aqualock Entry

Our Aqualock Entry provides a robust, high-performance solution for sealing service penetrations through concrete structures.

Designed to prevent water ingress and ensure complete watertight integrity, the Aqualock Entry system is essential for maintaining the durability of basement and below-ground structures.

The Entry comes with a 150mm internal diameter and comes in several different sizes to suit different wall thicknesses.

Our Entry units can be delivered direct to site, see page 2 for details.

Highlights


- » All units come with pre-fitted water tight covers. these can be removed when services need to be installed. Covers are removed with the Flexible Wrench.
- » Multiple Entry's can be clipped together. If required spacers can be used between Entry units to increase concrete cover between units.
- » All Entry units have 3 integrated puddle flanges.
- » Watertight, Radon proof Sealing – Ensures a secure, leak-proof seal around pipes, cables, and ducts, protecting structures from water ingress and damp-related issues.
- » Fully Compliant – Meets the highest industry standards, including BS 8102:2022, for reliable waterproofing performance.
- » High-Quality Materials – Manufactured from durable, corrosion-resistant materials, providing long-term performance in challenging environments.
- » Pressure-Tight Seals. Designed to withstand significant water pressures, ensuring optimal protection for below-ground structures.
- » Easy Installation – Quick and simple to install, reducing time on-site and minimising disruption to construction schedules.

Aqualock Seal

Aqualock Seal is A precision-engineered range of press seals designed to provide a completely watertight and pressure-resistant seal around service penetrations.


Whether used for pipes, cables, or ducts passing through concrete structures, the Aqualock Seal ensures long-term protection against water ingress.

See next page for pricing >>

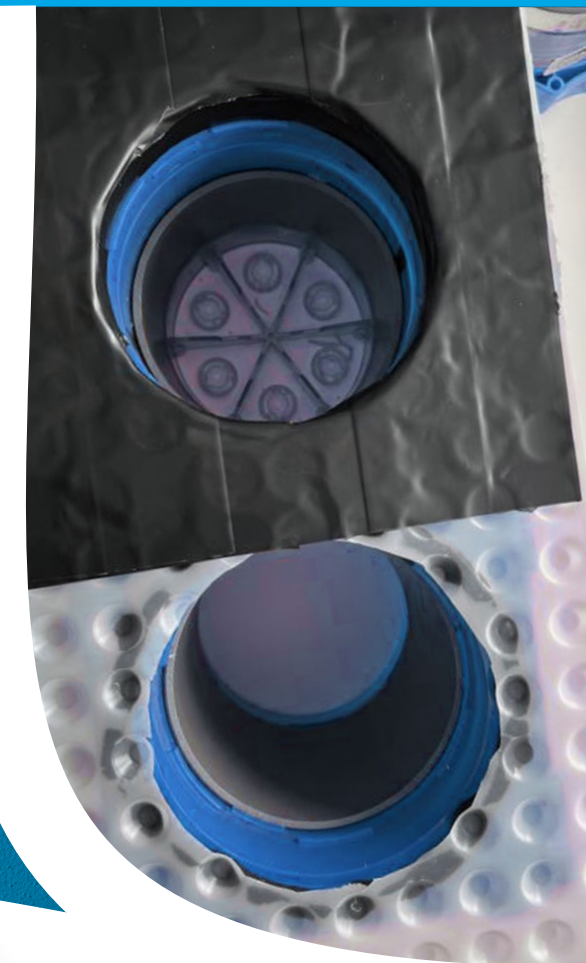

Aqualock - Service Penetration Sealing System


Rev1- 25/03/25 - [QMF code]

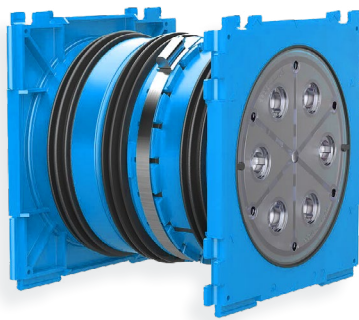

Pricing - Aqualock Entry

Wall Thickness	Cost
200-260mm	£68.00
260-365mm	£68.00
365 to 470mm	£68.00
470 to 575mm	£68.00

Item	Cost
Flexible Wrench	£96.00

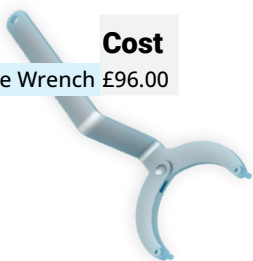

The MacLennan Aqualock Entry system is the trusted choice for contractors and developers looking to guarantee watertight service penetrations in waterproofed structures.

Please note: Carriage is not included in either price table.

Ensure complete peace of mind with MacLennan's proven expertise in structural waterproofing solutions.

Need something specific?
On request, Seals can be made custom. We also offer multiple solutions for most types of service medium! - Ask your surveyor for more information.

Pricing - Aqualock Seal

Wall Sleeve/ Hole I/D*	Number of Cables / Medium	No. of Openings	O/D of Service	Cost
150mm	1	1	12 to 75mm	£312.00
150mm	1	1	70 to 112mm	£285.00
150mm	3	3	22 to 54mm	£355.00
150mm	6	6	8 to 35mm	£371.00
150mm	9	9	6 to 25mm	£375.00
150mm	10	4	8 to 30mm	£388.00
150mm	10	6	3.5 to 16.5mm	£388.00

Aqualock Seal prices **Include** Installation by a MacLennan Technician.
*I/D refers to Internal Diameter



Need something bigger?

Try a Universal sleeve!


For those situations where larger diameter services need to be introduced into basements, such as pre-insulated pipes for ground source heating... we have the Universal Sleeve.

Sleeve Internal Diameter	Wall Thickness	Cost
200mm	up to 400mm	£117.00
250mm	up to 400mm	£223.00

We also offer 2 standard size Seals to accommodate larger services. other larger sizes are available, further information on request

Wall Sleeve/ Hole I/D*	Number of Cables / Medium	No. of Openings	O/D of Service	Cost
200mm	1	1	110 to 162mm	£313.00
250mm	1	1	159-211mm	£356.00

*I/D refers to Internal Diameter

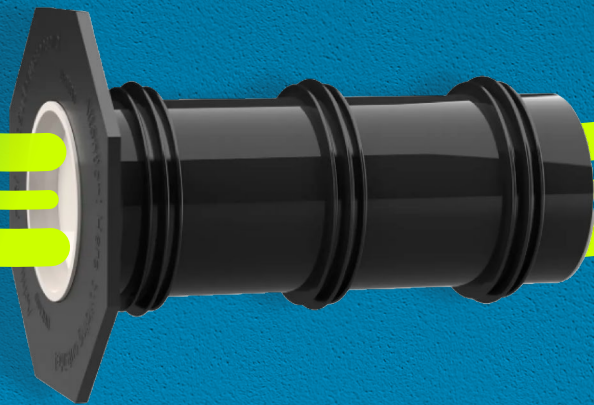

The universal sleeve comes in 100, 200, 250 and 300mm internal diameter.

The sleeve comes in a variety of lengths and can be cut to suit site requirements. It also incorporates 3 integral puddle flanges.

We offer 2 standard size sleeves to accommodate larger services.

Other, larger sizes are available, further information on request.

Admire.. But Don't Touch. A Disclaimer

MacLennan cannot accept any responsibility for damages incurred to property/services by modification of our seals.

MacLennan Take on the responsibility of ensuring the seal is installed correctly so services (and the project) are watertight.

This is why our Aqualock Seal costs **includes installation**. They are torqued to specific values and **must not** be adjusted by anyone else once installed, give us a call instead!



Delivery & Installation

Upon receipt of your order, MacLennan will calculate carriage and add it to your quote for approval.

Aqualock Entry can be supplied directly to your job site for casting in-situ.

- Our technical team can guide you along! Ask your Surveyor for more information.

Aqualock Seal can be brought by our installers directly to site or delivered beforehand.

