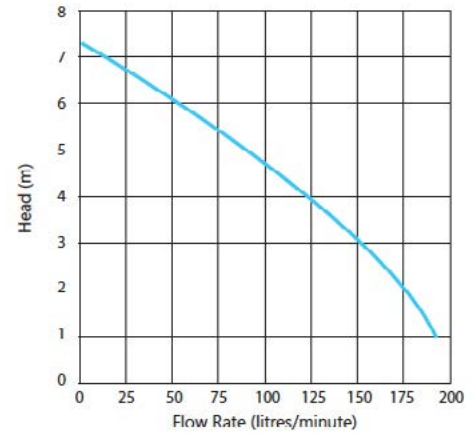


**CWP150 - CLEAN WATER PUMP**
**Description**

The MacLennan CWP 150 is a medium head and low to medium performance pump. The CWP 150 is an automatic pump with an integral vertical float switch, and so is not suitable for use with our pump control panels.

It can be used with our Power Converters of 1200W or over to give continual pumping even when the power is out.

The CWP 150 is supplied with a one way check valve and is suitable for either a 40mm or 50mm discharge pipe.


**TECHNICAL DATA**

Features	Result	Units
Pump Design	Semi-vortex	
Discharge Bore	Pump 32 (Max 50 pipe)	mm
Pumping Head (Max)	7.2	m
Flow Rate (Max)	153	litres/minute
Flow Rate at 4m Head	100	litres/minute
Soft Solid Passage	7	mm
Length	203	mm
Width	177	mm
Height	319	mm
Lowest or Stop Water Level	81	mm
Dry Weight	6.1	kg
Fluid Suitability	Rain water, ground water	
Fluid Temperature Range	0 to 40	°C
Motor Output	150	W
Power Supply	Single Phase	
Starter	Capacitor Type	
Vortex Impellor Speed	3000	rpm
Body Material	Stainless Steel and ABS Plastic	
Shaft Material	403 Stainless Steel	
Shaft Seals	Double Silicon Carbide	
Float Switch	Vertical Mechanical	

**FOR MORE INFORMATION**

**TEL:** 0845 658 777 | **EMAIL:** enquiries@MacLennanuk.com | **WEB:** www.MacLennanuk.com